



Air purifier operation instruction
This instruction manual for the following products

Maintenance record

Maintenance date	Maintenance content	Replacement parts		Repairer	The user signature
		Name	Quantity		

The warranty card at the time of purchase of the company products fill out immediately, please keep this card, the buyer will not CARDS sent back to the company

Directory

1. Understand the product

Product introduction	2-3
safety precautions	4-9

2. How to use this product

The safety of filter elements	10-11
Method of use	12-15

3. Cleaning and maintenance

Daily cleaning	16-17
Replace the screen	17-18

4. Technology and parameters


5. Fault and maintenance

Add: filter replacement card
Product warranty card

Product introduction

Understand product parts name can help you as soon as possible familiar with use

Front

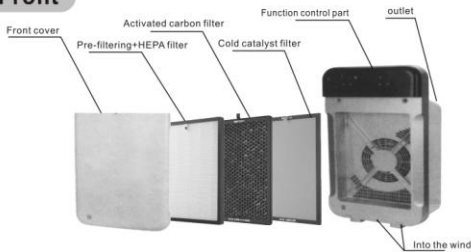

- In accordance with the "new three replacement law" provisions of the state, enjoy the service, the whole machine warranty for one year, main parts (motor) warranty for three years, the other filter elements for the material properties of the material, once the use is not in the scope of three packs of service.
- One of the following circumstances, not to enjoy the service, but you can pay to repair
 - consumers use, maintenance, improper safekeeping by the damage
 - does not bear the service repair damage to open
 - without the service certificates and valid invoice
 - the credentials and repair product model or altered
 - the damage is because can't resistance
- The product warranty start date to the invoice date
- Maintenance Please show me your invoice
- More than the warranty period or not belong to the warranty of the product, the company service center will sincerely for your service


Warranty card

Special statement

- If this product have any technology change in the future, without prior notice
- product appearance, color changes, if any, in kind prevail

Name		The phone	
Address		Zip code	
Model		Purchase date	
Buy site		Repair outlets	
Number		Invoice no.	

On the back

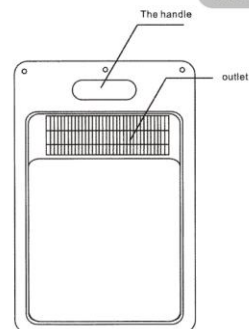


Safety Precautions

Thank you for choosing is commercial air purifier, please read it carefully before use the product the following safety precautions, to ensure the safe use!

Safe placement

Please read the following correct placement method, so as to avoid failure in use process



Please put the machine in the distanc the TV, radio and other electrical appliances 2 meters outside



More than about 10 cm from the wall

4

Filter replacement card

Customer service center group

Name _____ Contact _____ Age _____

Occupation _____ Home address _____

Buy Time _____ The type of machine _____

(In order to facilitate we provide filter replacement service for you in the future, please fill out the above information correctly)

Monthly income: 2000-5000() 5000-10000() 10000 or more()

Using location: bedroom () the sitting room() the company () other places()

Buy principle: brand appearance () function () by word () mouth ()

Customer Signature: _____

25

Assistants to fill out the information

The customer's name _____ Customer contact _____


Buy time _____ Machine type to buy _____

provinces _____ Area _____

Sales location name _____ The salesman _____

Service barcode _____

24



Please place the machine in the room air circulation use easily



Please do not place the machine in easy to run into the place of the curtain

5

Prohibitions:



1, part-time or unauthorized repair personnel, shall be to repair or rebuild the machine automatically



2, it is forbidden to use wet hands to operate, in order to avoid shock damage



3, shall not be charged cleaning, maintenance and move the machine



4, please don't in the air, the exit insert foreign objects, because the machine equipped with the high speed rotating rotor, to prevent accidental injury or machine damage

6

Mesh maintain little common sense

1, Purifier run every 200 to 200 hours later, remove the front screen, or vacuum cleaning with water, after cleaning pack has been completely dry front mesh back in place

2, When the machine mesh clean light is lit up, can use a vacuum cleaner or brush to clean HEPA filter (can't) washed with water, can take out the function of activated carbon network, in the sun to dry, repeat the use of its adsorption function (can not be washed with water)

3, When the HEPA filter using 1 to 2 years later, activated carbon filter screen appears when using 3 to 5 years under the condition of the damaged, recommend replacing new mesh (under the environment that is using different, mesh life will be slightly different)

4, Please don't have to change the filter element in the opposite direction to install use, or mesh adsorption dust will fly out again

23

The attachment

Filter replacement card

User al

The name _____

Machine type to buy _____ To buy time _____

Change the time for the first time _____ The second change of time _____

The third change of time _____ Change the time for the fourth time _____

Service barcode _____

22



5, it is strictly prohibited in the inflammable and explosive gas environment using native, and avoid long-term sunlight the unit



6, banned for the bathroom and humidity heavier and easy to pour into the water, prevent to get an electric shock

7

Tips:



1. the power cord ageing, knot, plug damage should immediately stop using, must by the manufacturer or the maintenance department or similar full-time personnel to replace



2. when using this machine, please maintain indoor airiness



3. please don't take the native place in tilted or other places is not smooth, in order to avoid machine fall, causing damage to the body or the body's internal

8

If the following situation, please send to repair

1. operation is not normal or don't run, according to the above method treatment is invalid
2. The foreign materials or who enter, appear abnormal situation

Service commitment

This product specifications comply with the "new 3 packets of law" the relevant provisions of the state

21

Breakdown maintenance

Before you request the repair, please use the form to check accordingly

The fault phenomenon	Possible reasons for	Possible solutions
The machine is not running	1. you don't have the power cord or plug in the power cord poor contact 2. you do not have to press the power switch	1. please plug in the power cord and make good contact 2. please press the "run switch" button on the surface of the operation, switching power supply
In addition to smoke, depodorization effect is poor	1. you will filter elements are, reverse installation is wrong 2. the service life of the filter elements have to 3 inlet by foreign bodies blocked	1. please determine the direction of filter components installed correctly 2. please replace the new filter elements 3. please remove foreign bodies of inlets

20



4. PLS don't use this in a environment with lampblack machine, such as the kitchen. This machine is not designed for filter soot and oil



5. This machine is suitable for indoor, please don't use it in outdoor

9

The safety of filter components

- Note: 1. the security filter at the time of the component, please cut off power supply
2. Please carefully cleaning mesh positive and negative, and avoid the wrong



1. remove the panel

Put the purifier with holding the concave side board, in his direction, gently pull the front panel at the bottom of the lift card buckle, pull it from the bottom of the product



2. remove the filter element

Holding the filter elements on both sides of the gap to pull, remove the filter element


10

Technology and parameters

Model	
The rated voltage	110V-220V
Rated frequency	50Hz
Rated power	35W
Rated noise	<55db
Solid pollution clean air volume	230m ³ /h
Solid pollutants purification efficiency level	A
Using the area	23m ³
Turning	6.5kg
Product appearance size (L x W x H)	330x220x550mm

In the above form various performance reference in accordance with the implementation of GB/T 18801, GB 4706.45 requires determination, before leaving the factory, for your reference

19



3. Please choose filters that can well match the machine model.




4. the steps for changing the filters, please refer to page 5. Order of the filters

Innermost	Cold catalyst filter
Middle	Activated carbon filter
Outmost	Pre-filtering+HEPA filter

18



3. Remove the bags, install screen mesh component packaging components apart, take out the new from the bag filter elements, Please install the filters from inside to outside according to the numbers indicated on the filters




4. Mounting panel

According to remove the installed reversed panel


11

Method of use

Please refer to the following control panel icon and instructions for using this product

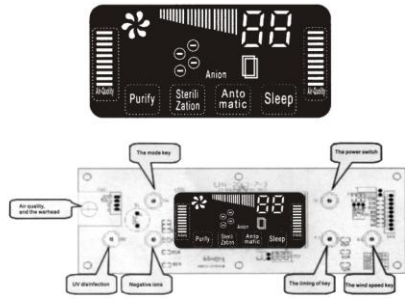

12



3. Activated carbon functional network
Clean strainer indicator, can take out the function of activated carbon network, in the sun drying can enhance its adsorption function

Replace the filter elements



1. Screen replacement
When HEPA filter use 1-2 years, activated carbon filter use 3-5 years mesh case of damage, such as cases, recommend replacing new mesh (in different environment, the use of the service life of filter will be slightly different)



2. Water filter elements
In addition to the filter on the front of coarse effect, other filter elements are not washed, can according to mesh the daily clean advice for cleaning or replacement

17

Cleaning and maintenance


Note:

1. Please be sure to pull the plug before clean maintenance, to ensure that the machine is not switched on
2. Please identify positive and negative filter elements, avoid installation errors
3. Best can put on the gloves when replacing filter elements, and the old filter elements with good discarded plastic bags, to prevent the old filter elements within the pollutants on the environment "secondary pollution"

Daily cleaning



1. Use a soft dry cloth to clean
Regularly use soft dry cloth to wipe away the dust in the fuselage, and the inlet, outlet dust to prevent dust accumulation



2. The HEPA filter clean
Mesh clean indicator, can use a vacuum cleaner or brush the HEPA filter cleaning precautions:
1 screen cleaning, it is recommended to use small soft brush or household vacuum cleaner
2 mesh clean only need to clean air inlet filter screen on the back of the don't need to clean (mesh frame)
3 use brush when cleaning, should follow the mesh horizontal clean to avoid vertical brush, so as not to damage the screen
4 when using the vacuum cleaner should keep absorb 5-10 mm away from the screen surface, so as not to damage the screen

16



1. Insert the power supply
Please insert the plug of air purifier power line voltage is 110V-220V, 50 hz, and ensure good contact Note: do not put the plug with wet hands, in order to avoid electric shock caused life-threatening, move the machine



2. The on/off
Press the "switch" key, the purifier is up and running, the display start according to running status, press the "switch" key once again, purifier stop running



3. The timing of key
Press the "timer" button can be set hours of work: can set - 1 h, 2 h... 8 h, according to " ", regular shutdown, invalid to manually turn it off; Set to complete start the countdown, countdown to complete close all output, close the display

13



4. Negative ion
Press the "anion" key, and negative ionic bond generator start work, negative ion indicator, then take clear negative ions, negative ions light is out



5. The sterilization
Purification mode, press the "sterilization" key, open the UV germicidal lamp, sterilization began to work. Sterilization pattern bright



6. The sleep mode
Machine into sleep mode, the fan runs at low speed, anion open, show only the light sleep, the rest of the icon is not bright, in addition to the "mode" key other buttons do not control: press the "mode" key to exit the sleep mode, run into a state of sleep patterns

14



7. The wind speed
Boot the default for low wind, according to the key switch accordingly

Keystrokes	State of wind speed
According to one	Low wind
According to the two	A stroke
According to the three times	The high wind

Warm prompt:
low and high wind wind issuitable for general use, it is recommended that you first boot or indoor quality particularly poor, use high windshield
The air quality indicator may show different colors, different color means different air quality.
Color air quality
Blue good
Yellow fair
Red bad
Caution: the air quality indicator will show more precisely the air quality after the machine works for 3-5 minutes.

15